

## EXTENSION LEADS


# Three Phase BRAIDED 415V

Manufactured to Australian & New Zealand  
Standards AS/NZS 3123, AS/NZS 3100,  
EN 60309-1 & EN 60309-2

✓ **CONSTRUCTION**  
AS/NZS3012

✓ **MINING**  
AS/NZS3012

✓ **EVENTS**  
AS/NZS3002

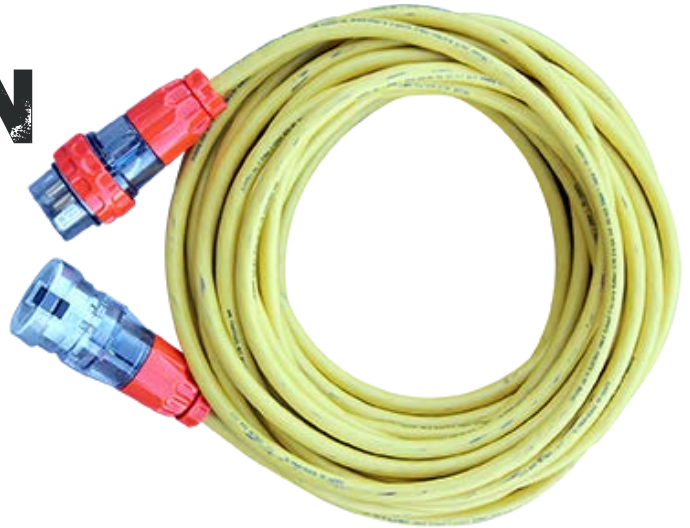

Braided screen  
attached to the  
internal earth core



## SPECIFICATIONS

	20Amp	32Amp	63Amp
<b>Cable</b>	6mm <sup>2</sup>	6mm <sup>2</sup>	16mm <sup>2</sup>
<b>Conductor</b>	Fine wire tinned annealed copper		
<b>Insulation</b>	Inner: Polyethylene Outer: E-rubber N30, flame retardant		
<b>Screen</b>	Tinned Copper Braid		
<b>Temp Range</b>	-40°C to +90°C		

## KEY FEATURES

**Extra Protection** braided screen to earth  
**Submersible Cable** up to 500 metres  
**Super Flexible Cable** eliminates tangles  
**Industrial Strength** longer life expectancy  
**Built in Australia** by fully qualified electricians  
**Plug & Socket** available in 56 style or Cee Form  
**Standard** lengths 10, 15, 20, 25 & 30 metres  
**Custom** lengths available on request  
**Custom Name** printed or heat shrink available



**POWER  
SAFE**  
PRODUCTS



## YOUR PARTNER IN PORTABLE POWER DISTRIBUTION

1800 338 979 | [sales@powersafe.net.au](mailto:sales@powersafe.net.au)

[www.powersafe.net.au](http://www.powersafe.net.au)